



AUTOMATIC AND CONTINUOUS SCREENCHANGER FOR PLASTIC RECYCLING

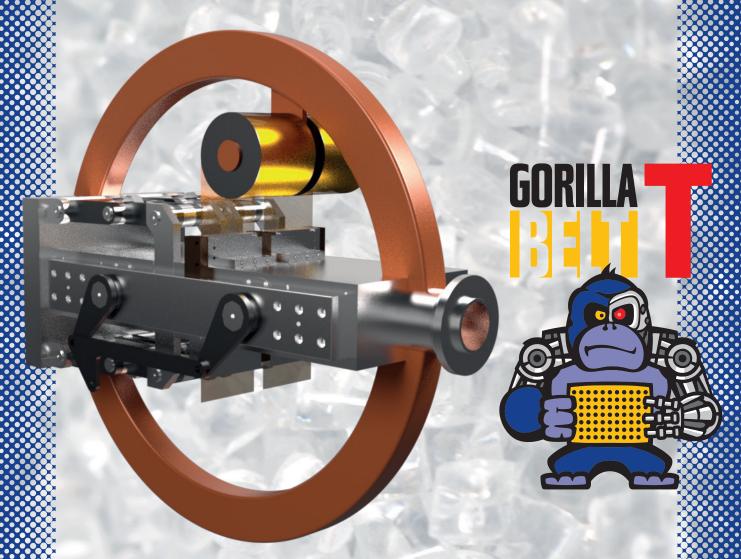

GORILLABELT T Advantages

- Zero polymer loss during the cleaning cycle
- No pressure peaks during screen changes
- Filtration level up to 50µm
- Low power consumption

- Contamination level +10%
- Hourly capacity +3.000 kg/h (+6,600 lbs/h)
- Low operating costs
- Easy maintenance

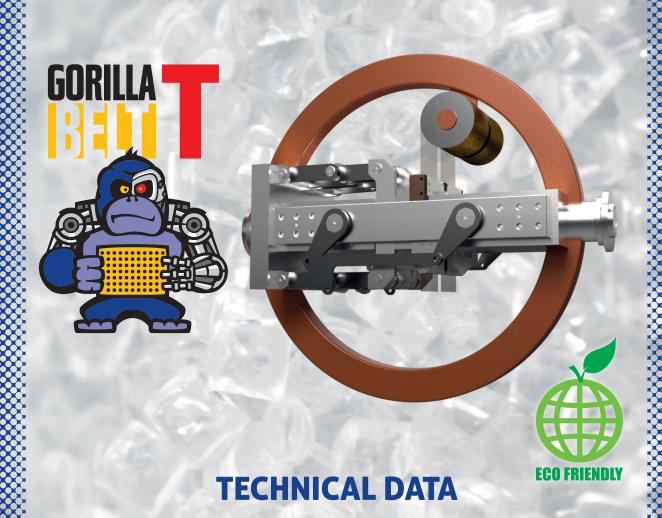

Processing: Automatic and Continuous

Filtering area: up to 816 cm²

Material contamination: very high, +10%

Impurities: any kind

Hourly capacity: +3.000 kg/h (+6,600 lbs/h)

Polymers: HDPE, LDPE, LLDPE, PP, PET, PS, ABS, PC, PA,

PMMA and more

Products and Applications: pellet, film, sheet, pipe, cable, profile, and more

Max filtration level: 50 microns (270 mesh)



Cofit International S.r.l. - Via J.F. Kennedy 9 - 20023 Cerro Maggiore (MI) - Italy
Phone +39 0331 93551 - info@cofit.com
Cofit North America - 4455 Murphy Canyon Rd #100 San Diego, CA 92123
Phone +1 (415) 659-9830 - info@cofitna.com

www.cofit.com