




Excellence in Screenchangers

AP SERIES

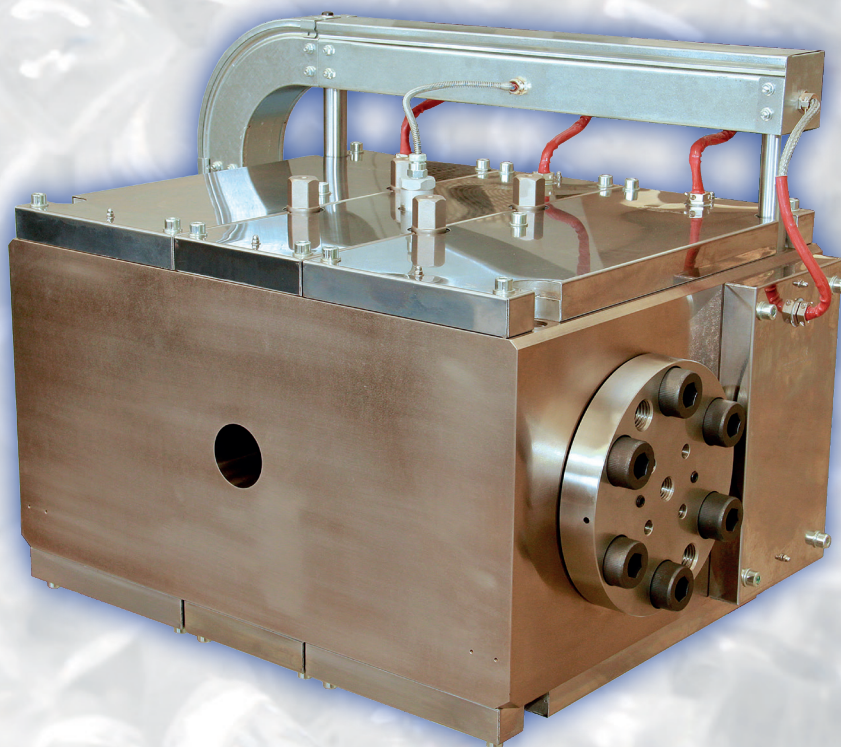

Cofit International S.r.l.

Via J.F. Kennedy 9 - 20023 - Cerro Maggiore (MI) - Italy - info@cofit.com - Phone +39 0331 93551

www.cofit.com

AP[®]SERIES - SELF-CLEANING CONTINUOUS FLOW SCREENCHANGER

AP IS SELF-CLEANING

Thanks to an exclusive Cofit patent the filter cartridges get cleaned without being taken out of the block.

AP IS CONTINUOUS


The filtering cartridges can be cleaned and replaced without having to interrupt production.

AP IS ECONOMICAL

It is solid, reliable and durable. And it is cheap too, if compared with other continuous equipment.

It doesn't need an expensive control panel or a hydraulic unit.

Its maintenance and spare parts are reduced to the minimum.

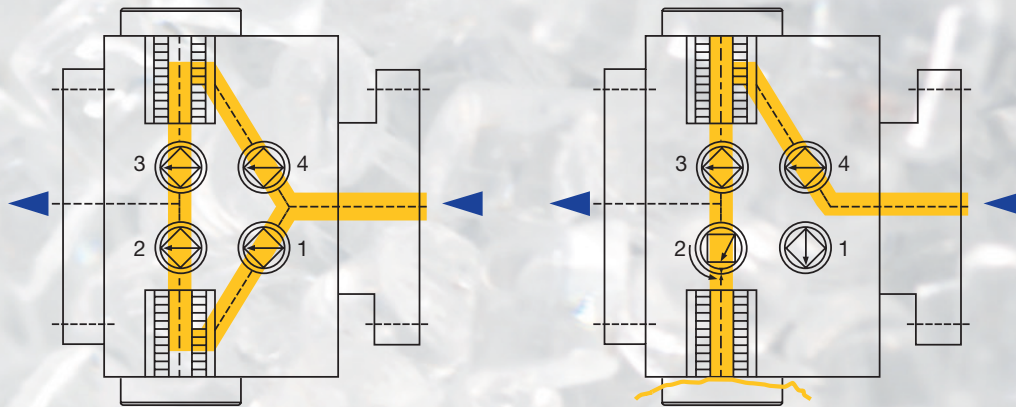

TECHNICAL DATA:

Processing: Continuous flow - SELF-CLEANING

Filtering area: Up to 1010 cm² (156 in²)

Material status: Very suitable for low contaminated materials

Hourly capacity: Up to 1.300 kg/h (2.866 pounds)

Machined product: BOPP, BOPET, PE, PP, ABS, PET, Nylon, PA, PS, etc.

Applications: Cast film, Blown film, Filaments, Nonwoven, Spunbond, Wire & Cable, Pipes, Technical articles and more